


Republic offers a complete line of regenerative blowers for high vacuum or compressed air applications in both horizontal and vertical mounted positions. TEFC motors are rated for 50/60 Hz operation and are cUL, UL, and CE certified. The impeller is directly connected to the motor shaft, providing powerful air force without undue friction. The bearings are outside the compression chamber, ensuring maximum operational reliability under high differential pressure. Constructed in robust die-cast aluminum, this low-maintenance, oil-free design provides continuous, dependable service to our customers.




PERFORMANCE

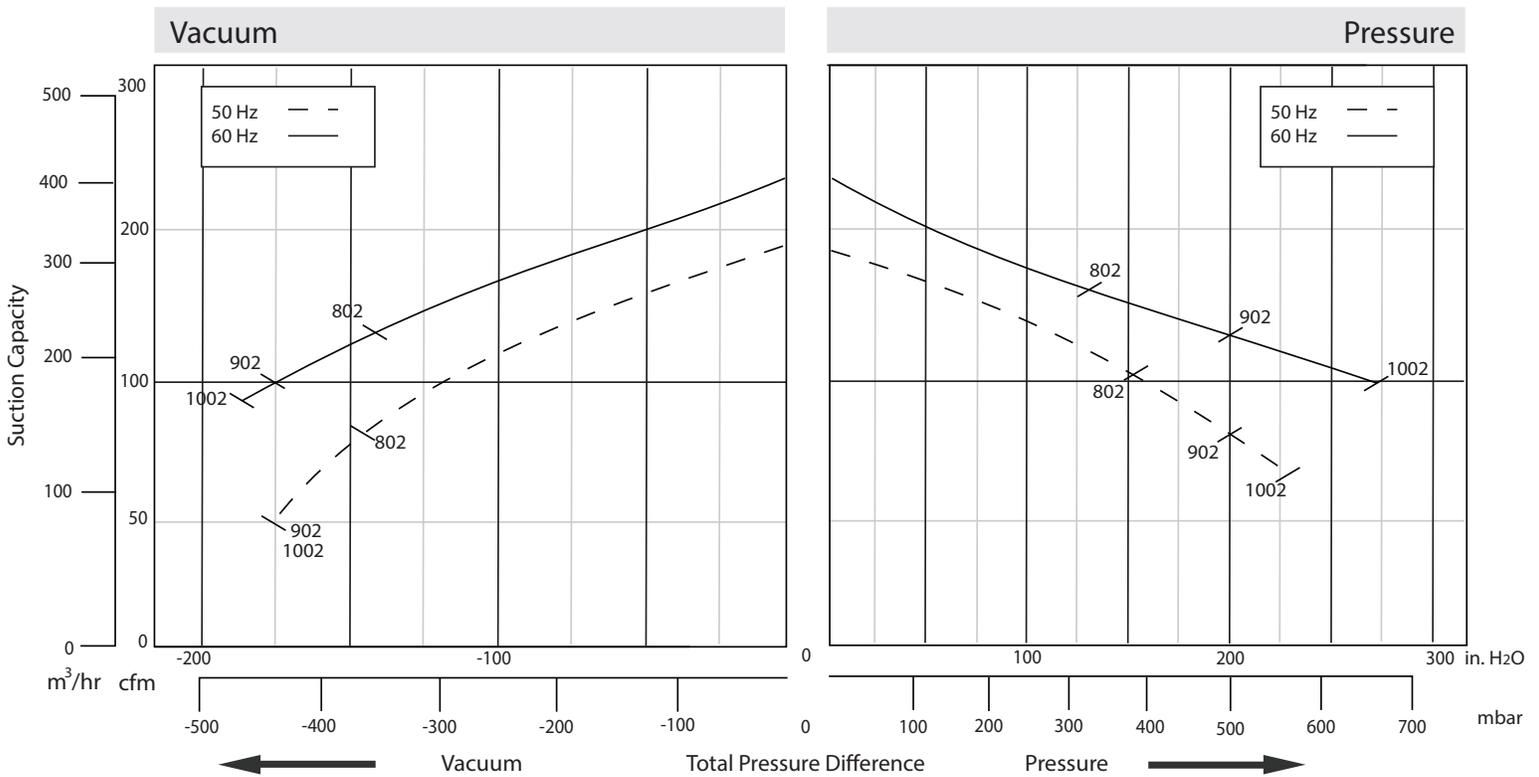

Model	Phase	Frequency (Hz)	Air flow (CFM/m³/hr)	Rated Vacuum (in. H ₂ O/mbar)	Rated Pressure (in. H ₂ O/mbar)	Motor (HP/kW)	Voltage (V)	Current (A)	Sound Level (dB)	Weight (lb/kg)
HRC 802	3	50	188/320	145/360	153/380	5.8/4.3	200-240 Δ/345-415 Y	17.3 Δ/10.0 Y	73	123/56
		60	227/385	141/350	129/320	6.4/4.8	220-275 Δ/380-480 Y	18.0 Δ/10.4 Y	76	
HRC 902	3	50	188/320	177/440	201/500	7.4/5.5	200-240 Δ/345-415 Y	23.0 Δ/13.3 Y	73	154/70
		60	227/385	177/440	201/500	8.4/6.3	220-275 Δ/380-480 Y	23.0 Δ/13.3 Y	76	
HRC 1002	3	50	188/320	177/440	229/570	10.1/7.5	200-240 Δ/345-415 Y	29.0 Δ/16.7 Y	73	163/74
		60	227/385	185/460	269/660	11.5/8.6	220-275 Δ/380-480 Y	30.0 Δ/17.3 Y	76	

The performance curves are based on air at a temperature of 59 °F and an atmospheric pressure of 29.91 inch Hg with a tolerance of +/-10%. The total pressure differences are valid for inlet and ambient temperatures up to 77 °F. Suction capacity relates to inlet conditions. Pressure capacity relates to atmospheric conditions. For other conditions please contact Republic. Three phase motor tolerances are +/-10% for fixed voltage motors and +/-5% for voltage range motors. Single phase machines are designed with a +/-5% tolerance. The frequency tolerance is +/-2% maximum.

APPROXIMATE DIMENSIONS

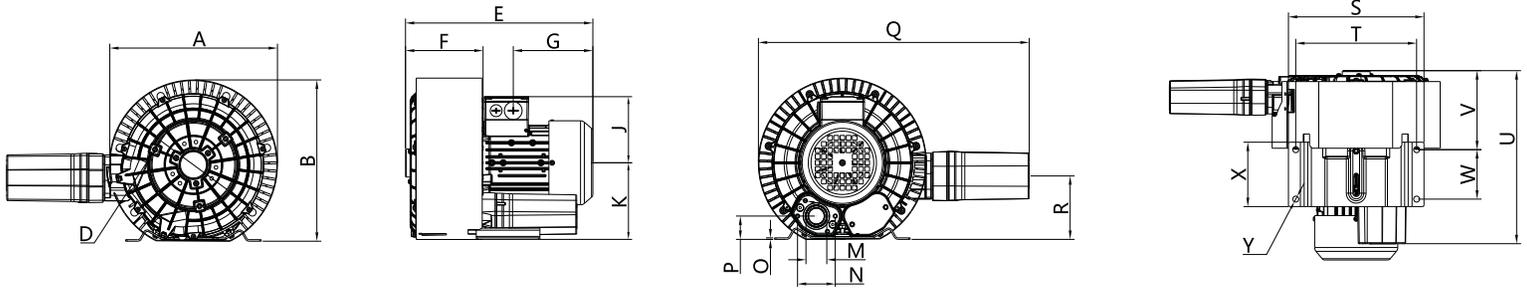


Model	Unit	A	B	D	E	F	G	J	K	M	N	O	P	Q	R	S	T	U	V	W	X	Y
HRC 802	in	16.77	16.54	M10	20.71	8.90	8.23	5.83	7.68	2.00	3.27	0.18	2.01	25.12	6.34	12.80	11.42	16.85	8.07	N/A	N/A	0.59
	mm	426	420		526	226	209	148	195		83	4.5	51	638	161	325	290	428	205	N/A	N/A	15
HRC 902	in	16.77	16.54	M10	22.48	8.90	8.90	6.57	7.72	2.00	3.27	0.18	3.62	25.12	6.34	12.80	11.42	22.44	8.07	5.51	7.09	0.59
	mm	426	420		571	226	226	167	196		83	4.5	92	638	161	325	290	570	205	140	180	15
HRC 002	in	16.77	16.54	M10	22.48	8.90	8.90	7.76	7.72	2.00	3.27	0.18	3.62	25.12	6.34	12.80	11.42	22.44	8.07	5.51	7.09	0.59
	mm	426	420		571	226	226	197	196		83	4.5	92	638	161	325	290	570	205	140	180	15

Available Options

All Republic Regenerative Blowers are available in pre-assembled kits for either pressure or vacuum applications. These kits include an inlet filter, gauge and relief valve, and are factory tested prior to shipment. Optional items for these kits include check valve, and tube adaptor; washdown motors, explosion proof motors, or other specialty motors; noise enclosures; and control panels such as VFD's, PLC's, or starter panels.

VACUUM KIT

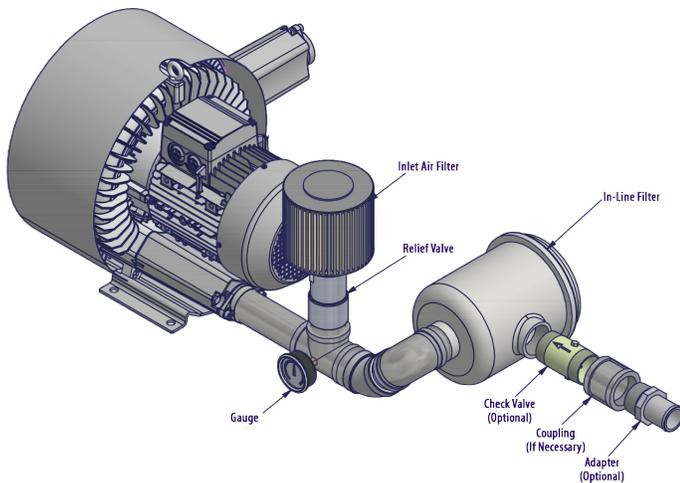

PRESSURE KIT

